


# CB5023 R1 In-Wall Dimmer (Z-wave Plus)

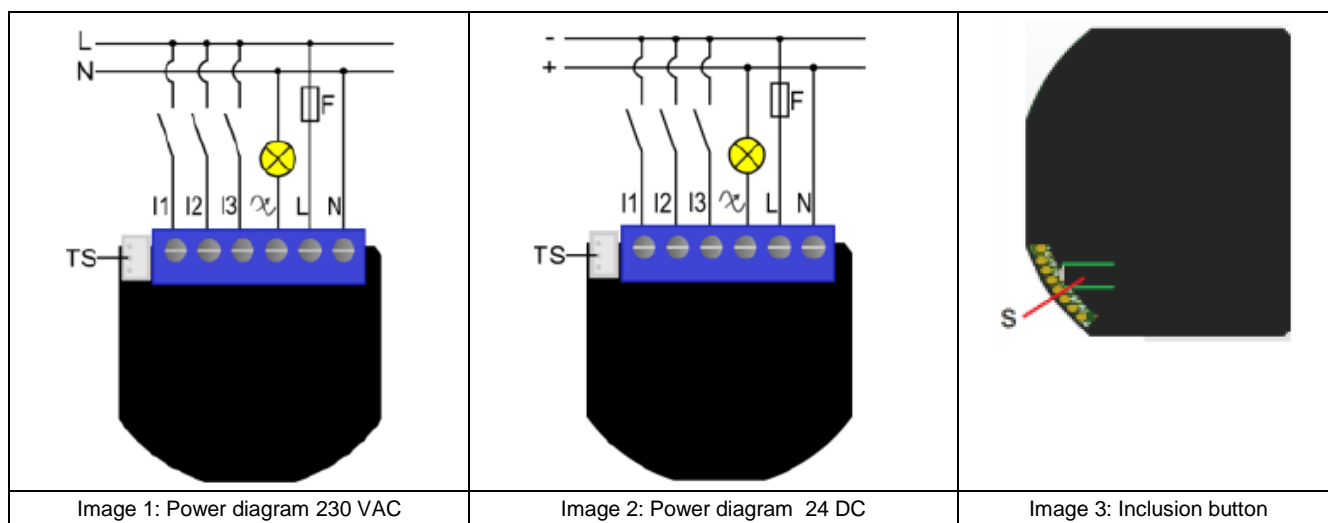

### Connections:

N	Neutral wire (blue)	I1	Input for switch button or pulse button (use first)
L	Phase (brown)	I2	Input for switch button or pulse button
F	Optional fuse (1A)	I3	Input for switch button or pulse button
⌘	Output for lamp of ventilation		

## Warning and points of attention



### Risk of fatal injury from electrical current.

If you do not have enough electrical skills, do not continue and let a certified electrician do the job for you. Otherwise you might get injured and/or electrocuted.

The outputs may carry an electrical voltage even when the device is switched off. Always disconnect the main fuse in the incoming circuit from the power supply before working on connected loads.

Do not connect the module to loads exceeding recommended values. Connect the module only in accordance to the electrical diagrams.

## Add the device to your e-Domotica e-Centre Base station

Follow the steps below to include the devices to your e-Domotica system. You might need to enable 'Normal/High power' (below the 'Include' button). This option is available to include devices on a greater distance.

1. Make sure your computer, tablet or smart phone is completely started and connected to the same network
2. Open a web browser.
3. Enter "http://ecentre/wiz" in the address bar of your web browser and press the 'Enter' key on your keyboard.
4. The webpage of the e-Centre will be shown. If the Wizard is started, click 'Exit Wizard'.
5. Go to the 'e-Domotica Products' page.
6. Click the 'Include' button. The e-Centre will start to search for new e-Domotica devices.
7. You have three options:
  - a. Include automatically, the device will include itself automatically into the e-Centre base station (within 30 minutes)
  - b. Include manually using switch button: Press 3 times within 3 seconds on the wall switch button or pulse button
  - c. Manually using S button (not recommended): Press and hold the S button on the device for 2 seconds.
8. A message will appear: 'Product found'.
9. Give the device a name, choose a location and click 'Save'.
10. The device has now been added to the e-Centre base station. The e-Centre base station will now be able to control the switch.

If the device is not found, press the 'Exclude' button in the e-Centre's webpage and then click the button on your switch. After this procedure you can add the new device correctly.

## Service and support

Go to the e-Domotica website for more support, i.e. an advanced manual of this device, but also instruction video's, practical examples, warranty conditions, frequently asked questions and contact information for our helpdesk.

Scan the QR code or go to: <http://www.e-domotica.com/en/customer-service>

